


Digital Temperature Measurement Face Recognition Access Control Terminal is a kind of Access Control device with precise recognition rate, large storage capacity and fast recognition, which integrates Face Recognition Technology and Non-Contact Temperatures detection Technology. The Digital Temperature Measurement module supports rapid Body Temperature Detection. Thus, the product can achieve Face Recognition and Temperature Detection at the same time and support warning people with Abnormal Body Temperature.

Applications

- * Small Factories
- * Schools
- * Cinema Theaters
- * Universities
- * Hospitals
- * Office Buildings
- * Malls Entrance
- * Restaurant
- * Supermarket and other Important Areas

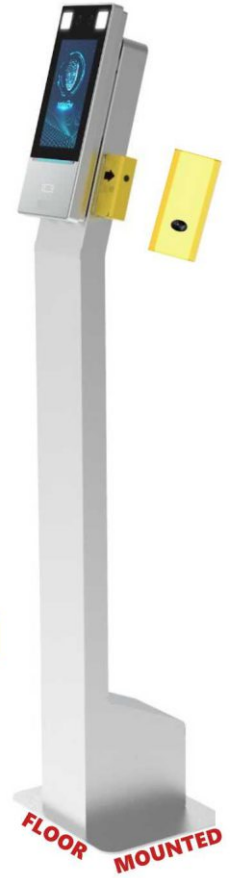


FACE RECOGNITION ACCESS CONTROL TERMINAL DIGITAL TEMPERATURE MEASUREMENT SOLUTIONS

- * Support non contact detection of wrist temperature, support warning people with abnormal body temperature
- * Support Body Temperature Detection and personnel information binding, which can quickly confirm personnel information and do body Temperature Detection
- * Support configure temperature detection threshold value, and personnel access authority can be configured through temperature detection threshold value
- * Non contact wrist temperature detection module, measurement range is between 30° to 45° measurement accuracy can reach 0.1°, measurement deviation is less than or equal to 0.5° and measurement distance is between 1cm to 2.5cm
- * Deep learning algorithm model based on independent intellectual property rights, face recognition accuracy rate >99% false rate <1%
- * Built-in deep learning dedicated chip, supports local offline recognition, 10000 face capacity face white list (1:N)
- * Fastest recognition time 0.2 seconds, various model merge mode are used to reduce false rate and increase pass rate
- * WDR, 2MP (1080P) low illumination wide angle camera and F1.6 large aperture lens for capturing high quality with various complex lighting scenes
- * Support anti-spoofing detection based on deep learning algorithm, effective against fraud such as photo and video
- * Support face metering and human metering for fast adapting to ambient light
- * Suggested height for face recognition between 0.8M and 2.2M, face recognition distance: 0.2M to 2.9M
- * Support screen sleep mode, keep the minimum brightness to prevent glare at night
- * Support add up to 6 Photos of the base library for a Single Person
- * Support Video capture, Support ONVIF Protocol
- * Support Face, Card, Password and QR Code authentication to control door open
- * Two way Audio with Indoor Monitor
- * Built-in 4G EMMC front end storage, stable and reliable, up to 30,000 events capacity
- * Support tamper protection, door open timeout and time exceed alarm function to keep door opening during fire alarm active

Operation System	Linux
Face Recognition Accuracy Rate	>99%
Face Recognition Time	200ms
Face Capacity	10,000
Card Capacity	1,00,000
Storage Capacity	4GB
Event Capacity	30,000 (with images)
Measurement Range	30°C - 45°C
Measurement Accuracy	0.1°C
Measurement Deviation	≤±0.5°C
Measurement Distance	1cm-2.5cm
Authentication Mode	Face Whitelist : (1 : N) Card:(1:N) Face +Body temperature
Door Opening Method	Face, Password, QR code, Card
Communication Mode	10/100Mbps adaptive network port
Card Type	Mifare 1 Card
User Management	Support user library addition, deletion, update
Record Management	Support local recording and real-time upload

Design & Specifications are subject to change without Prior notice



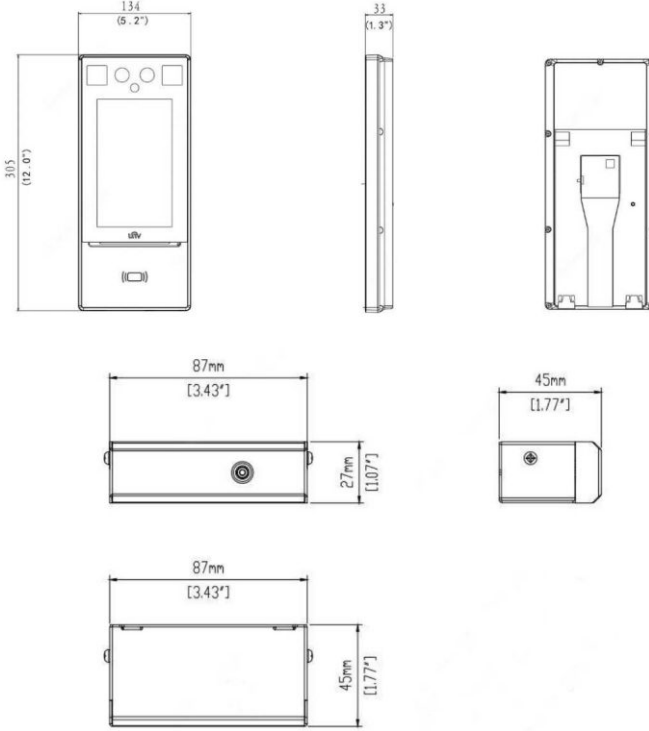

Interface	LAN×1, Wiegand Input×1, Wiegand Output×1, RS485×1, Alarm Input×2, Alarm Output×1, USB2.0×1, Lock×1, Door Contact ×1, Exit Button×1
Power Supply	Input 12V±25% DC
Screen	Touch Screen, Size:7 inch, Resolution: 600×1024
Camera	Dual Lens, 2MP, 1080P
Supplement Light	LED soft light and infrared light
Dimensions (L×W×H)	For terminal : 134.0mm×33.0mm×305.0mm
Working	For terminal: -20°C~ +65°C, Relative Humidly<95% (non-
Protection Level	Both terminal and module: IP 54
Application Situation	Indoor, No wind

